



Be on the Cutting Edge

DuraSlic ceramic coatings and ancillary products have been developed in partnership with the world's leading detailers. Products are thoroughly tested in the laboratory using industry standard procedures as well as proprietary methods unique to the ceramic coatings market.



Learn more at
Duraslic.com



DuraSlic[®]
VEHICLE PROTECTION

***PROFESSIONAL GRADE
CERAMIC COATINGS***



This product is exclusive to our Detailer Network



Looks Great

- Easier to keep clean
- Enhance paint gloss



Protect Your Investment

- Contaminants won't stick
- Scratch resistance



Durability

- Long lasting chemical bond
- Scrub testing ASTM standard




Proudly Made in USA

Development, Production & Support

- We know the the hard work & commitment needed to make a detail studio successful
- We love competing to be the best in the industry

Sliding Angle

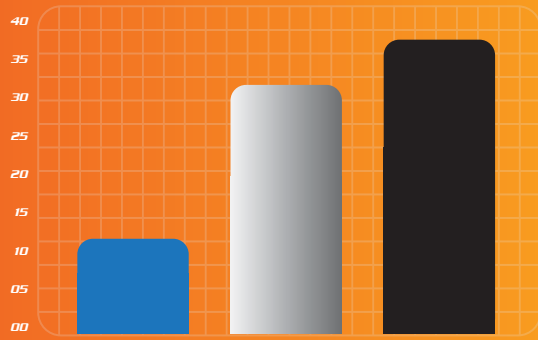

Coating

FlowX

DS Xtreme

DS 1500



DS 1500 XTREME Professional Grade Ceramic Coating

DS 1500 Xtreme is the world's most advanced wipe-on ceramic, coating that offers a high level of both hydrophobicity and oleophobicity. It can be applied to painted, coated and base metal surfaces, glass and plastics, to impart an unprecedented level of protection from water, chemicals, UV and corrosion.



DS 1500 Ceramic Coating

DS 1500 offers a high level of hydrophobicity, oleophobicity, gloss, abrasion resistance, UV protection and is a robust long lasting coating. DS 1500 can be top coated with Speedcoat to achieve higher levels of hydrophobicity and protection.



FlowX Ceramic Top Coat

FlowX is a ceramic top coat deigned to give vehicles the silky smooth finish they deserve. This versatile spray can be used to lower surface sliding angle, making maintenance a breeze.



Speedcoat Ceramic Spray Boost

Speedcoat is a water-based spray-on coating. Speedcoat's easy to apply format makes it the best way to finish off any detail job. Can be used as a topper or standalone.

Choose Your Coating

	DS 1500 XTREME	DS 1500	Speedcoat	FlowX
Hydrophobicity	✓ ++	✓	✓	✓ +
Contact Angle	105	90	94	98
Repellence	✓ ++	✓	N/A	✓ +
Oleophobicity (1-5)	5	2	1	3
Coating Lifespan <small>*with proper maintenance</small>	7-10 Years	3-5 Years	6 Months	Bonds to coating
Maintenance Schedule	6 Months	3 Months	1 month	1 Year
Slickness		✓	✓ +	✓ ++
Sliding Angle	32.5	37.3	23.8	11.2
Ease of Care	✓ +	✓	✓	✓ ++

Scrub Testing Durability

